




Profile

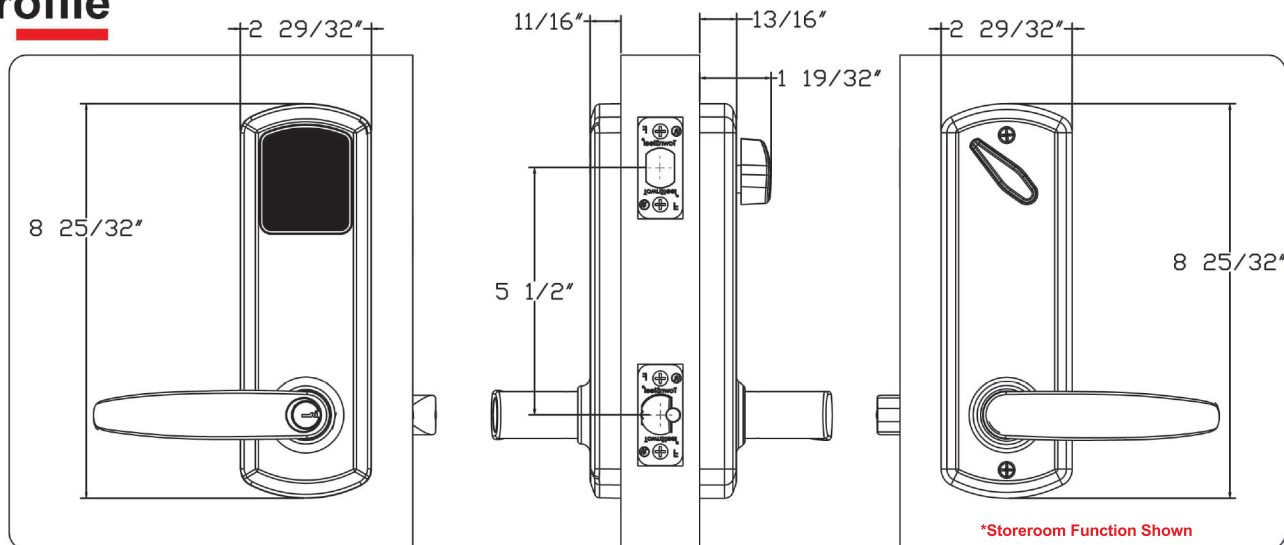




※ 55: 5.5" center-center (4" also available, please see next page)

How To Order

Series	e-Genius	Model Number	EG	Lever	6T	Lockbody	T-SLH	Cylinder	626-55W	SC
Function	S: Storeroom / T: Entry (Toggle Function)									
Lever Style	S: Sentinel / Q: Quest / W: Wolfsburg / WR: Wolfsburg R									
Finish	619: US15, Satin Nickel / 622: US19, Flat Black 626: US26D, Satin Chrome / Or special color upon request									
Faceplates	N: 1" x 2-1/4" / W: 1-1/8" X 2-1/4"									
Cylinder	SC: 6 pin KIK Core, Schlage C Keyway HS: High Security SFIC core is also available. Please see Genius series for details.									



Profile

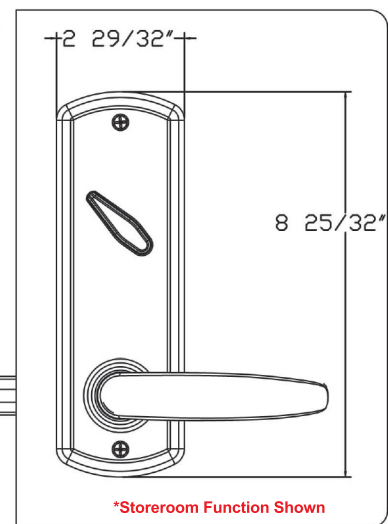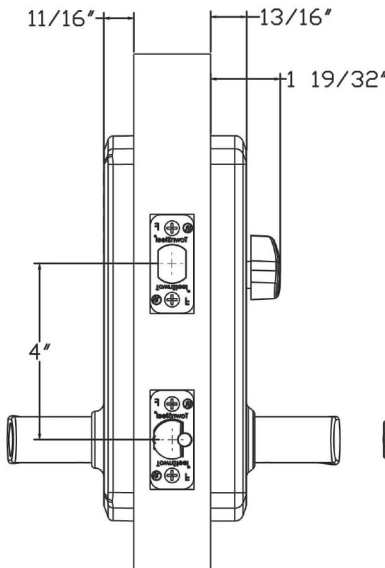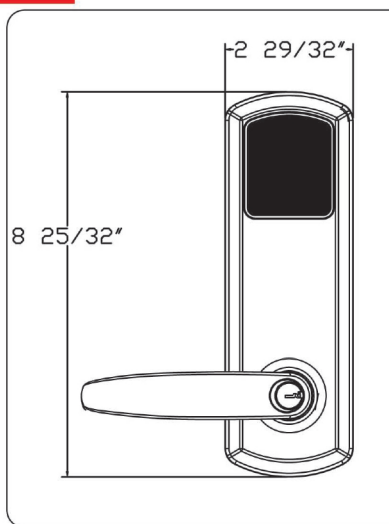

※ 40: 4" center-center (5.5" also available, please see previous page)

How To Order

Series	e-Genius	Model Number	EG	Lever	T	Lockbody	SLH	Cylinder	626
Function	S: Storeroom / T: Entry (Toggle Function)								
Lever Style	S: Sentinel / Q: Quest / W: Wolfsburg / WR: Wolfsburg R								
Finish	619: US15, Satin Nickel / 622: US19, Flat Black 626: US26D, Satin Chrome / Or special color upon request								
Faceplates	N: 1" x 2-1/4" / W: 1-1/8" X 2-1/4"								
Cylinder	SC: 6 pin KIK Core, Schlage C Keyway HS: High Security SFIC core is also available. Please see Genius series for details.								

Model Number Lever Lockbody Cylinder
EG 6 T T - SLH 626 - 55 W SC
Function Finish Faceplates

e-Genius

Electronic Interconnect Lock

★ US PATENTED



4" Entry lock with turn button shown

Mechanical Specifications

- Door Thickness: 1-3/4"
- Backset: 2-3/8" - 2-3/4" adjustable
- Clutched trim
- Latchbolt: 1/2" throw stainless steel deadlocking
- Deadbolt: 1" stainless steel deadbolt
- Faceplates: 1" x 2-1/4" or 1-1/8" x 2-1/4"
- Latch Strike: Full lip with radius corners
- Deadbolt Strike: 1-1/8" x 2-3/4" radius corners with security underplate
- 4" or 5-1/2" deadbolt center to latchbolt center distance available
- Available Storeroom Function (always locked) or Entry Function (with Toggle passage)
- Multiple credentials available such as keypad, RFID and BLE. Offline or online, stand-alone or Maxx Access system

Available Lever Styles



Sentinel (S)



Quest (Q)



Wolfsburg(W)



Wolfsburg R(WR)

Code Compliance

- Americans with Disabilities Act
- EU RoHS Directive 2002/95/EC
- ANSI/BHMA A156.12 Grade 1 certified
- ANSI/BHMA A156.25 Meets Industry Standards
- UL 10C 3 Hour Rated
- FCC Part 15 certified


e-Genius Series

Electronic Interconnect Lock (available in 4" or 5 1/2" spacing)




www.townsteel.com

4"
(40 lockbody)

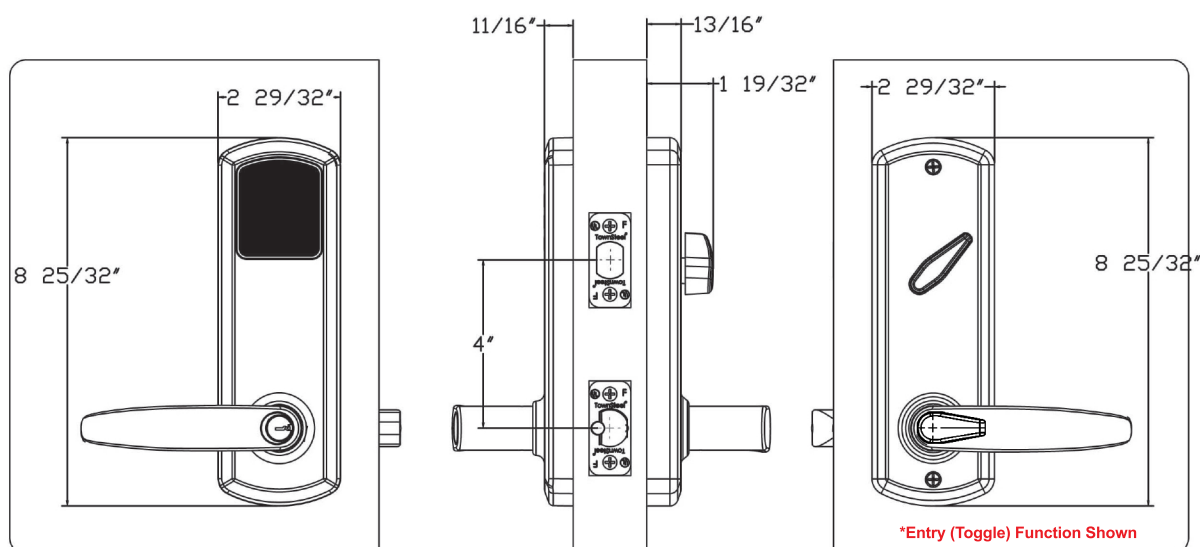

5 1/2"
(55 lockbody)

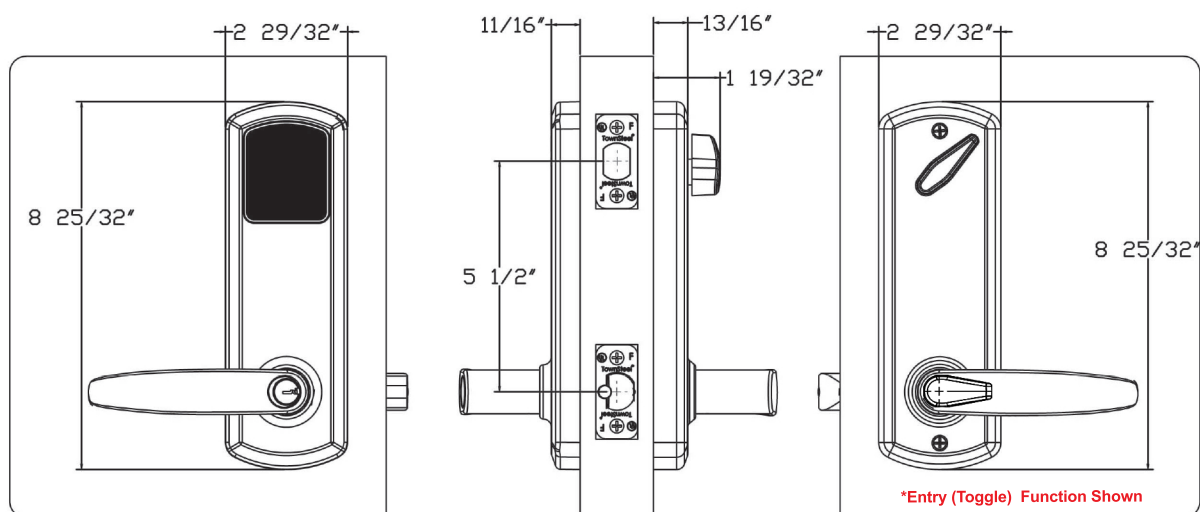

How To Order

Series	e-Genius	Model Number		
Function	S: Storeroom / T: Entry (Toggle Function)			
Lever Style	S: Sentinel / Q: Quest / W: Wolfsburg / WR: Wolfsburg R			
Handing	RH / LH / RHR / LHR			
Lockbody	40: 4" / 55: 5-1/2"			
Faceplates	N: 1" x 2-1/4" / W: 1-1/8" x 2-1/4"			
Finish	619: US15, Satin Nickel / 622: US19, Flat Black 626: US26D, Satin Chrome / Or special color upon request	Example:	2 : Keypad	
Cylinder	Key in lever option:		4 : RFID + Keypad	
	SC Schlage® 6-pin with "C" keyway, standard		5B: RFID + Keypad + BLE	
	K6 Kwikset® 6-pin with "KW" keyway		5R: RFID + Keypad + RF	
	HS6 High security 6-pin with TownSteel "L" keyway	Model Number Lever Finish Faceplates	6 : RFID + MAXX ACCESS	
	SF6 Best® 6-pin, IC core with "A" keyway			
	SF7 Best® 7-pin, IC core with "A" keyway			
	HS7 High security 7-pin, IC core with TownSteel "L" keyway			
	Less cylinder core option:	EG 6 T T - S L H 6 2 6 - 5 5 W S C	Function	Handing
	SF Schlage® small format IC, SFIC		Lockbody	Cylinder
	SLF Schlage® large format IC, SLFIC			
	CLF Corbin® large format IC, CLFIC			